



WCN Opto Group Co., Ltd

**LED STRIP LIGHT**

Company Name	<input type="text"/>
Date	2017/12/27
Part No.	WCN-FT5050RGB1-60AT
Product Group Description	<input type="text"/>
Customer Part No.	<input type="text"/>
Approval Date	<input type="text"/>

Customer Confirmation

Quality Dept. Confirmation

Engineering Dept. Confirmation

ZhangChun  
2017/12/27

Prepared By

LiuGuo  
2017/12/27

Provenance: China

WCN Opto Group Co., Ltd

5th Floor,Block A-2,Xuxingda Ind Zone  
Shiyan Town,Bao An District , Shenzhen  
Tel : (86)755-29000022  
Fax : (86)755-29000023



www . wcnopto.net



**LED STRIP LIGHT****CONTENT**

<b>ITEM</b>		<b>PAGE</b>
(1)	<b>FACE OF SPECIFICATION</b>	<b>1/6</b>
(2)	<b>CONTENT</b>	<b>2/6</b>
(3)	<b>REVISION RECORD</b>	<b>3/6</b>
(4)	<b>FEATURES AND DESCRIPTION</b>	<b>4/6</b>
(5)	<b>Outer Dimension and Circuit Diagram</b>	<b>5/6</b>
(6)	<b>ABSOLUTE MAXIMUM RATING AND ELECTRICAL/OPTICAL CHARACTERISTICS</b>	<b>6/6</b>

**SPEC . NO :** WCN-FT5050RGB1-60AT

**DATE :** 2017/12/27

**VER. NO :** A0

**Page :** 2 of 6

**LED STRIP LIGHT**

**REVISION RECORD**

MARKER	Matter for revision	SHEET	DTAE	MAKER	APPOVED SIGN			
	Reason for revision							
A0	New Version issued	WHOLE SHEET	2017/12/17					
	P#WCN-FT5050RGB1-60AT							
REMARK		P# WCN-FT5050RGB1-60AT				PAGE:3 of 6		

**LED STRIP LIGHT****Features :**

- Linear separable LED strip on flexible printed circuit board with self-adhesive back
- Long life ,easy installation
- Voltages available 12VDC
- LED: 60pcs 5050 RGB,
- PCB material : FPCB


**Product Picture:**

Part No	Color	Surface Coating	Waterproof level	Q`ty of LEDs/M	Color Temp/Wavelength Typ(Kelvin/nm)	Luminous flux(LM/M)	Voltage (V DC)	Power (W/M)
WCN-FT5050RGB1-60AT	RGB	No Silicon	IP20	60	625/525/465	24000/60000 /15000	12	14.4


**LED STRIP LIGHT**

<b>APPEARANCE</b>			<b>PCB Material</b>	<b>FPCB</b>
<b>Description</b>	<b>Lens Color</b>	<b>Waterproof level</b>	<b>Led Emitted Color</b>	<b>RGB</b>
			<b>Driver Mode</b>	<b>12V DC</b>
<b>RGB</b>	<b>No Water</b>	<b>IP 20</b>	<b>Packing</b>	<b>5 meters per roll</b>

■ **Circuit Diagram:**

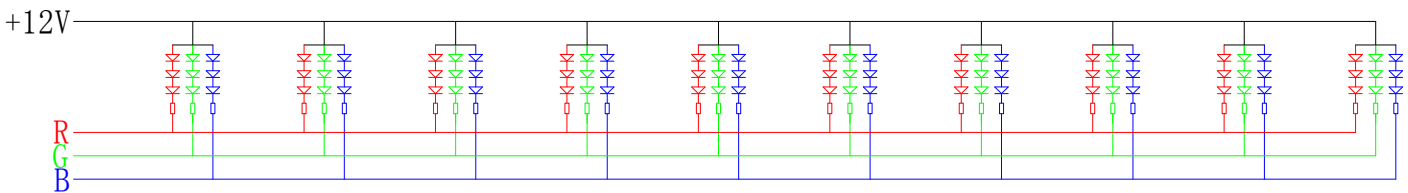

■ **Outer Dimension:**



**Explain:**

1. LED 5050 (PLCC4) 60PCS/M
2. Resistance (1206 180 Ω and 1206 300 Ω)-----60PCS/M
3. 12V Drive

**Notes: 1.UNLESS OTHERWISE STATED, THE TOLERANCE IS ±3MM.**

**LED STRIP LIGHT**
**ABSOLUTE MAXIMUM RATINGS AT TA=25°C**

Parameter	Symbol	Rating	Units
Input Voltage	V	12 DC	V
Forward Current	I <sub>F</sub>	50	mA/smd
Input Frequency	F	---	Hz
Power Dissipation	P	14.4	W
Operating Temperature	T <sub>e</sub>	-20~+40	°C
Storage Temperature	T <sub>s</sub>	-20~+60	°C
Operating Humidity	/	10 - 65% RH NON-CONDENSING	/

**Typical Performance (Ta=25°C)**

Item	Symbol	Rating			Units
		Min.	Typ.	Max.	
Input Voltage	V	10	12	14	V
Beam Pattern	BP	---	120	---	Deg
Total Length	L	---	5	---	M/roll
Estimated Life [1]	Life	---	50000	---	hour
Optimized Thermal Management(Body Temperature)	/	-20	---	40	°C